
FLOW RATE TEST FOR "LINE" DRAINERS

TESTS MADE ACORDDING TO NORM UNE—EN 274 (08/04/2025)

FLOW RATE USING BLACK CUP: **33 L / MIN**

FLOW RATE WITHOUT USING BLACK CUP: **48 L / MIN**

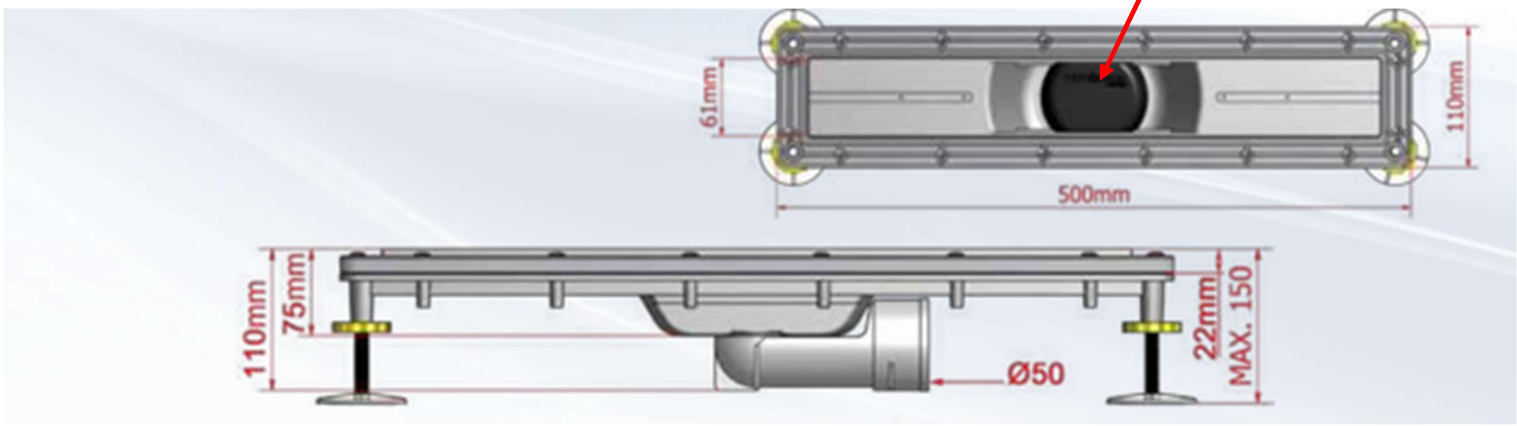

These tests have been done on the smallest model of TECNOAGUA's Line drain for shower tray, Model: T-181C (50133)

If you have any doubts our questions, please let feel free to contact us.

CONECTA CON NOSOTROS

HIDROTECNOAGUA, S.L.

AVDA. DEL RODALET, Nº 20 – 03690 SAN VICENTE DEL RASPEIG · ALICANTE (ESPAÑA)
MAIL info@hidrotecnoagua.com · **WEB** www.hidrotecnoagua.com
TLF +34 965 672 611 · · **FAX** +34 965 663 367

EMPRESA CERTIFICADA ISO 9001